

UNIVERSAL ICU690

Technical Sheet

Woofer




- Polyglass cone, natural sound
- Compact dimensions, easy to install

SPECIFICATIONS

| | | |
|------------------------|------------|--------|
| Nominal power | 80W RMS | |
| Maximum power | 160W | |
| Sensitivity (2,83V/1m) | 93.6dB | |
| Frequency response | 55Hz-21kHz | |
| Cone type | Polyglass | |
| Surround type | Butyl | |
| Nom. impedance | 4Ω | |
| VC diameter | 25mm | 1" |
| Net weight | 1.25kg | 2.7lbs |




FREQUENCY RESPONSE/IMPEDANCE

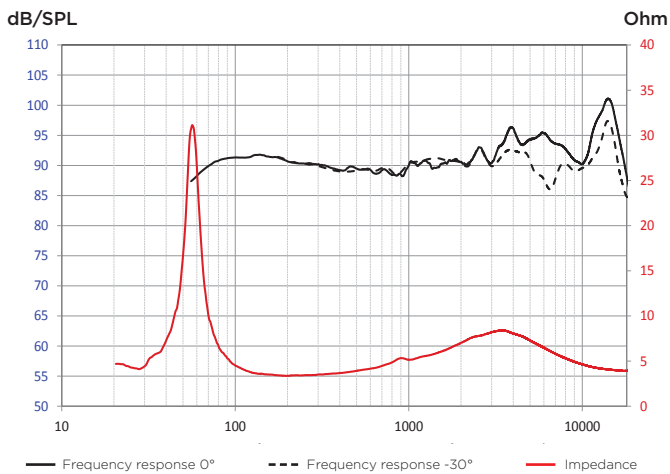

PARAMETERS

| | |
|-----|--------------------|
| Fs | 57Hz |
| Vas | 24l |
| Qts | 0.74 |
| Qes | 0.81 |
| Qms | 8 |
| Re | 3.2Ω |
| Sd | 210cm ² |
| Cms | 0.39mm/N |
| Mms | 20g |
| Bl | 5.3N/A |

MECHANICAL DRAWING

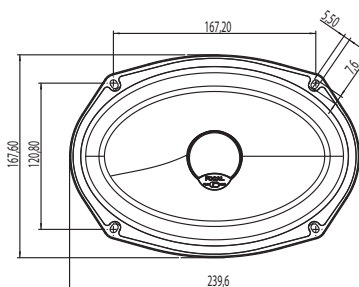

Integration
INSTANT GRATIFICATION

Focal America - Tel 1 (888) 340 4403 - www.Focal-America.com - @FocalAmerica

FOCAL
LISTEN BEYOND