

PANAMAX® M5300-PM

LOOKING FOR **CRYSTAL CLEAR** PICTURE AND SOUND?



- 4** **Clean Power Level 4**
Improves picture and sound quality by eliminating noise across the entire AC bandwidth. 40% more efficient at eliminating noise than Clean Power Level 3.
- AVM (Automatic Voltage Monitoring)**
Protects equipment against prolonged over/under voltages by disconnecting the power and reconnecting it when safe power returns.
- High Current Outlets**
2 outlets for equipment with high power demands (Amps/Subwoofers).
- USB Charger**
Convenience charger for mp3 players, cell phones, and other small electronics.
- Gaming LAN Port**
Easy access to LAN port on front panel. Perfect for online gaming.
- 5 Isolated Outlet Banks**
Isolating outlet banks from one another prevents noise contamination between components.
- 12 Volt Trigger**
Allows source equipment to activate or deactivate the outlets on the M5300-PM.
- Power Sequencing**
Guards against blown fuses and potentially damaging speaker thump by automatically powering outlets on and off in sequence.
- 11 Outlets**
5 Always On, 4 Switched, 2 Switched High Current.

M5300-PM

HOME THEATER POWER MANAGEMENT

1 Improves Picture and Sound Quality

Level 4 Power Cleaning and Filtration eliminates common symptoms of contaminated power (including loss of detail, pops, hisses, hums and visual artifacts) and allows your A/V equipment to perform up to its full capability.

2 Monitors Incoming Line Voltage and Provides a Visual Indication of Power Level

Panamax's patent pending AVM™ circuitry continuously monitors the incoming power as displayed on the digital voltmeter. In case of an undervoltage or an overvoltage, a flashing red lightning bolt will be displayed in the voltmeter, and power to the connected equipment is automatically turned off if either of these conditions is detected. When voltage returns to a safe level, power to the equipment is automatically reconnected.

3 Reduces Cross-Contamination Between Components

The M5300-PM is designed to provide noise isolation between 5 isolated outlet banks (including 1 bank with 2 high current outlets) so that any noise created by an A/V component cannot contaminate the power going to equipment plugged into another outlet bank.



Three Year Product Warranty*
\$5,000,000 Limited Connected Equipment Policy**
Product Upgrade Program**
*See actual warranty/policy for details.

www.panamax.com

PANAMAX

M5300-PM BACK PANEL FEATURES


1. 15A Main Circuit Breaker:
Automatically opens when the current load is greater than 15 Amps. Push to reset.

2. Outlet Bank 5
Two switched, high-current outlets controlled by the front panel Power Button or the DC Trigger input. Bank 5 has a 5 second turn on delay and turns off immediately upon shutdown. The High Current outlets provide power from a low impedance noise filtration circuit that does not limit the current to your equipment. Its output is noise-isolated from all other outlet banks.

3. Outlet Banks 3 and 4
Each bank features two switched outlets with linear filtration technology (LiFT) controlled by the front panel Power Button or the DC Trigger input. Banks 3 & 4 will turn on immediately and turn off after a 10 second delay. LiFT EMI/RFI noise filtration is provided by a two-stage balanced Pi filter which also provides noise isolation from all other outlet banks.

4. Outlet Banks 1 and 2
Each bank features two always-on outlets with linear filtration technology (LiFT). Power will only be turned off under a fault condition. (See specifications for over-voltage and under-voltage thresholds). LiFT EMI/RFI noise filtration is provided by a two-stage balanced Pi filter which also provides noise isolation from all other outlet banks.

5. Universal Coaxial Connectors
3 pairs of bidirectional protection circuits optimized for satellite, cable, and antenna TV signal lines.

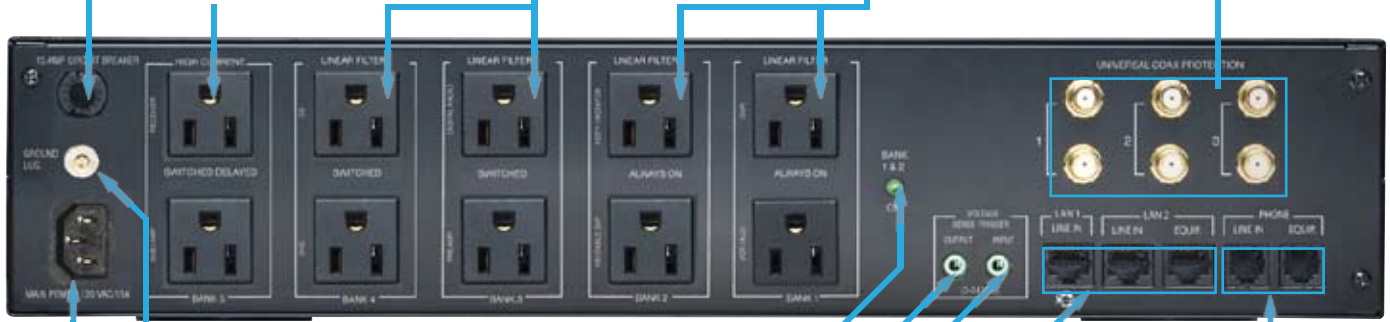

6. Main Power Cord 10ft.
Must be plugged into a properly wired & grounded 3-wire outlet.

7. Ground Lug:
Provides a common grounding point for equipment with separate ground leads.

8. Bank 1 & 2 Indicator Light
Normally ON, is lit when there is power present on the Bank 1 and 2 receptacles.

9. Voltage Sense Trigger Output
3.5mm (1/8") Mini-Plug jack. Connecting a trigger wire to the Voltage Sense Output jack will allow the input signal to pass through the M5300-PM to control the startup/shutdown of an additional device.

10. Voltage Sense Trigger Input
3.5mm (1/8") mono mini-plug. Connect to a remote trigger device that uses a DC output to trigger a startup/shutdown sequence.

11. LAN Jacks
Protection circuits for 10/100 baseT Ethernet lines. For the LAN 2 protected jacks, the incoming LAN line MUST be plugged into the LINE jack and the patch cord to the equipment MUST be plugged into the EQUIP jack. For the LAN 1 protected jacks the incoming LAN line must be plugged into the LINE jack and the equipment must be plugged into the gaming jack on the front panel. 8 wire protection, 60V ± 5V clamping.

12. Phone Jacks
Protection circuits for standard telephone or pay-per-view lines. Phone circuit is autoresetting. Incoming phone cord MUST be plugged into the LINE jack. Patch cords to the equipment (satellite receiver, digital video recorder, telephone, etc.) MUST be plugged into the EQUIP jacks.

M5300-PM SPECIFICATIONS

General

Dimensions 17 in. W x 12.75 in. D x 3.5 in H, (4.1 in. Including feet)
Weight 14 lbs.

AC Power

Line Voltage 120V, 60Hz
Voltage Regulation No
Total Current Capacity 15 A (1800 W)
Voltage Protection Rating (UL1449 3rd Edition, 3,000A) 500V
Protection Modes L-N, L-G, N-G
Initial Clamping Level 200V Peak, 141V RMS
Energy Dissipation 2350 Joules
Peak Impulse Current 75,000 Amps
Catastrophic Surge Circuit Yes
Thermal Fusing Yes

Auto-resetting Over-voltage shutoff 142 VAC ± 8 VAC
Auto-resetting Under-voltage shutoff 86 VAC ± 6 VAC

EMI/RFI Noise Filtration

Bank 1 Up to -86 db (100 KHz – 2 MHz)
Bank 2 Up to -91 db (100 KHz – 2 MHz)
Bank 3 Up to -81 db (100 KHz – 2 MHz)
Bank 4 Up to -100 db (100 KHz – 2 MHz)
Bank 5, High Current Outlets Up to -81 db (100 KHz – 2 MHz)

DC Trigger Input

Jacks 3.5mm (1/8") mono mini-plug
Voltage and Polarity 3 - 24V DC, bidirectional
Current Requirement 4.6 mA @3V, 58 mA @24V

DC Trigger Output

Pass through no delay
Positive = Tip, Negative = Ring

LAN Protection

Clamping Level 60V ± 5V
Compatibility 10/100bT
Connectors RJ-45
Wires Protected 8-Wires

USB Circuit

Jacks USB-A
Power Delivery 500 mA @ 5 VDC

Telco Protection

Fuseless/Auto-resetting Yes
Clamping Level 260V
Capacitance 30pf (approx.)
Suppression Modes Metallic & Longitudinal
Wires Protected 2-Wire, Pins 4 & 5
Connectors RJ-11

Universal Coax Protection

HD 1080 i/p Ready Yes
Shielded Yes
Clamping Level 75V
Frequency Range 0 MHz - 2.2 GHz
Insertion Loss < 0.5 dB
Connectors Female "F", Gold Plated
Bidirectional Yes

Design and specifications subject to change without notice due to product improvement.

UPC'S, QUANTITIES, WEIGHTS & MEASUREMENTS FOR ORDERING & SHIPPING

MODEL M5300-PM		UNIT CARTON			MASTER CARTON			
Dimensions	Weight	Dimensions	Weight	UPC	Qty	Dimensions	Weight	UPC
17" x 12.75" x 3.5" 4.1" H with feet	14 lbs	23.25" x 19" x 9.25"	18 Lbs	0 50616 00816 7	1	23.75" x 19.75" x 10"	20 Lbs	5 00 50616 00816 2

